

APPLICATIONS

CHRYSLER

Town & Country 2008
Sebring 2007

DODGE

Dakota 2008
Grand Caravan 2008
Journey 2009
Nitro 2007
Avenger 2008

JEEP

Wrangler 2007

XSVI-6522-NAV INSTALLATION INSTRUCTIONS

In the Chrysler/Dodge/Jeep vehicles listed on back there are no 12 volt accessory wires in the factory radio harness making the installer run an accessory wire to the fuse box or underneath the steering column when installing an aftermarket radio. The XSVI-6522-NAV is designed to provide a 12 volt 10 amp switched accessory output along with the rest of the wires needed to install an aftermarket radio. The R.A.P. (Retained Accessory Power) function is retained by the XSVI-6522-NAV. The XSVI-6522-NAV also provides essential wires required for aftermarket radios that have navigation. Provided is VSS (Vehicle Speed Sense), Reverse, and Parking Brake. This cuts down the installation time since the installer does not have to look for these wires in the vehicle.


Note: the XSVI-6522-NAV does not retain OEM amplifiers.

Wiring the XSVI-6522-NAV: Wiring up the XSVI-6522-NAV is like wiring up any other wire harness that would attach to the aftermarket radios harness. wire code can be found on the back of this package that will aid you in the wiring of your aftermarket radio.

Navigation wire colors:

Blue/Pink – VSS (Vehicle Speed Sense)
Green/Violet – Reverse
Lt. Green – Parking Brake

INITIALIZE THE XSVI INTERFACE BEFORE TURNING ON RADIO: With all connections made and harnesses connected to the vehicle, turn ignition key to the ON position for thirty seconds, then turn key off.

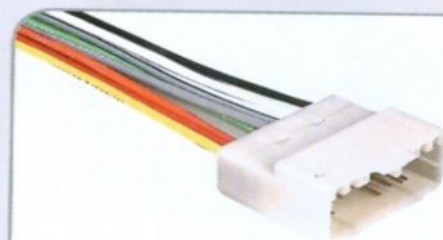

XSVI-6522-NAV
Select 2007-2008
Chrysler/Dodge/
Jeep

COLOR CODE

COLOR	FUNCTION
RED	ACCESSORY
YELLOW	BATTERY
BLACK	GROUND
BLUE	POWER ANTENNA
BLUE/WHITE	AMPLIFIER TURN ON
ORANGE	ILLUMINATION
ORANGE/WHITE	DIMMER
GRAY	RIGHT FRONT +
GRAY/BLACK	RIGHT FRONT -
WHITE	LEFT FRONT +
WHITE/BLACK	LEFT FRONT -
VIOLET	RIGHT REAR +
VIOLET/BLACK	RIGHT REAR -
GREEN	LEFT REAR +
GREEN/BLACK	LEFT REAR -